


Cable Display Instructions

(Wall to Wall System)

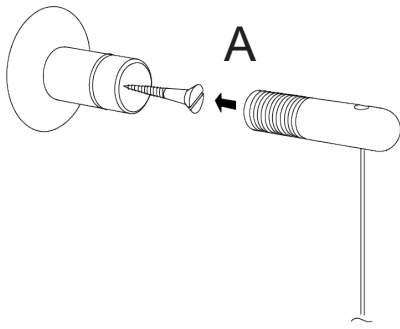

IMPORTANT: It is essential to check that the top wall fixings are strong enough to take the weight of the items being displayed, whilst allowing for the tension in the cables.



1) Select the height you would like the system to start.
Fix **Fitting A** to the wall at this point, using the suitable fixing for your wall type.

2) Using a 'plumb-line', plumb down and mark a point and fix **Fitting C** to this point.

3) Separate the two sections of **Fitting B** (B1 & B2) and screw this end section (C1) into the base wall fitting

4) Loosen the two grub screws in the small brass fitting (B3) with an allen key and slide to the desired length.
Re-tighten the grub screws and cut off the surplus cable about 4mm from the bottom of the fitting. See **fig.1**

5) Re-connect the two sections of **Fitting B** (B1 & B2) and tighten to adjust tension

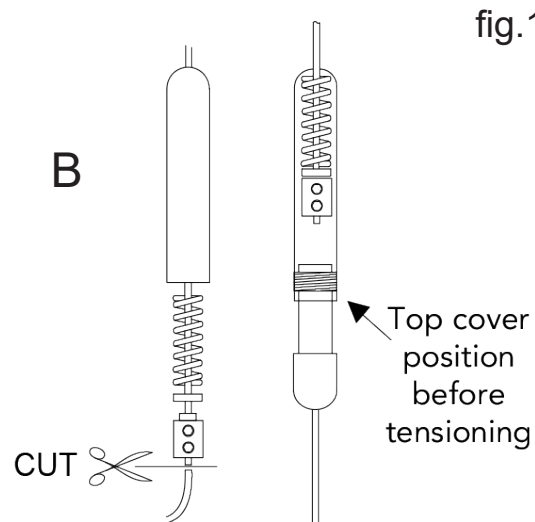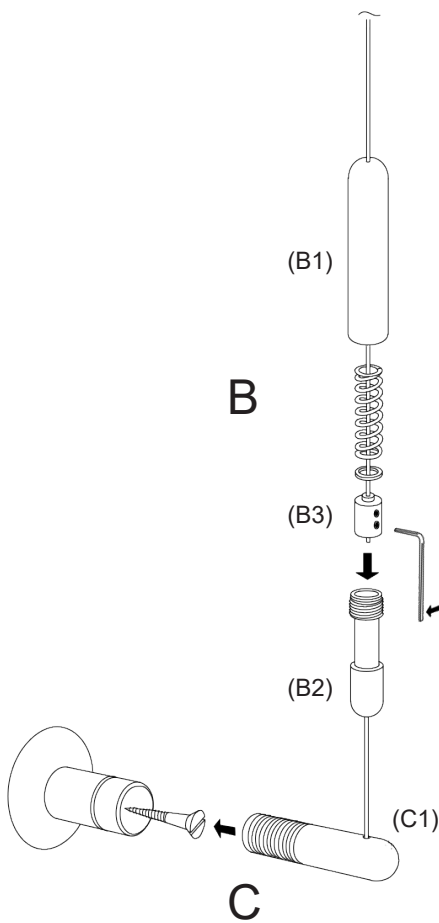

peakrock.com & artestuff.com

Head Office: Peak Rock Ltd • Unit 4 Horizon Business Centre • Veridion Park • Kent • DA18 4AJ • UK
Showroom: Unit 30 DRCA Business Centre • Battersea Park • London • SW11 5HD • UK

Office Tel (UK): +44 (0)20 8320 8800
Office Fax (UK): +44 (0)20 8311 7777
Tel Sales (USA): 888 608 8444
Email: sales@artestuff.com